



BLIND RIVETS


■ **ASCE** Closed End Type Aluminum Rivets with Steel Mandrels IFI 126 / Grade 19

RIVET CODE	RIVET DIAMETER D	HOLE SIZE (inch)	RIVET LENGTH L (max)	GRIP RANGE G	HEAD DIAMETER H	HEAD THICKNESS T (max.)	STANDARD STRENGTH Lbs (min.)	
							SHEAR	TENSILE
41	1/8 0.1250	0.129 ~ 0.133	0.297	1/32 - 1/16	0.224 ~ 0.252	0.050	240 <i>1070N</i>	280 <i>1250N</i>
42			0.360	1/16 - 1/8				
43			0.422	1/8 - 3/16				
44			0.485	3/16 - 1/4				
45			0.547	1/4 - 5/16				
46			0.610	5/16 - 3/8				
48			0.735	3/8 - 1/2				
52	5/32 0.1562	0.160 ~ 0.164	0.375	1/32 - 1/8	0.296 ~ 0.328	0.065	350 <i>1560N</i>	480 <i>2140N</i>
53			0.437	1/8 - 3/16				
54			0.500	3/16 - 1/4				
55			0.562	1/4 - 5/16				
56			0.625	5/16 - 3/8				
58			0.750	3/8 - 1/2				
62			3/16 0.1875	0.192 ~ 0.196				
63	0.468	1/8 - 3/16						
64	0.531	3/16 - 1/4						
66	0.656	1/4 - 3/8						
68	0.781	3/8 - 1/2						
610	0.906	1/2 - 5/8						
612	1.026	5/8 - 3/4						
82	1/4 0.2500	0.257 ~ 0.261	0.445	1/32 - 1/8	0.475 ~ 0.525	0.100	900 <i>4000N</i>	1100 <i>4890N</i>
84			0.570	1/8 - 1/4				
86			0.695	1/4 - 3/8				
88			0.820	3/8 - 1/2				
810			0.945	1/2 - 5/8				
812			1.070	5/8 - 3/4				
814			1.195	3/4 - 7/8				
816			1.320	7/8 - 1				

1" = 25.4mm (1 inch = 25.4 millimeter)

- Closed end blind rivets are designed to enclose the mandrel head after fastening
- Provide a high shear, vibration resistance and pressure tight.
- Suitable for many applications which ask for waterproof

SRC-111003

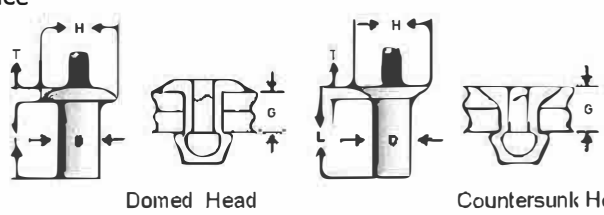

Due to continuous development we reserve the right to alter specifications without prior notice.