


Supplier Performance Data

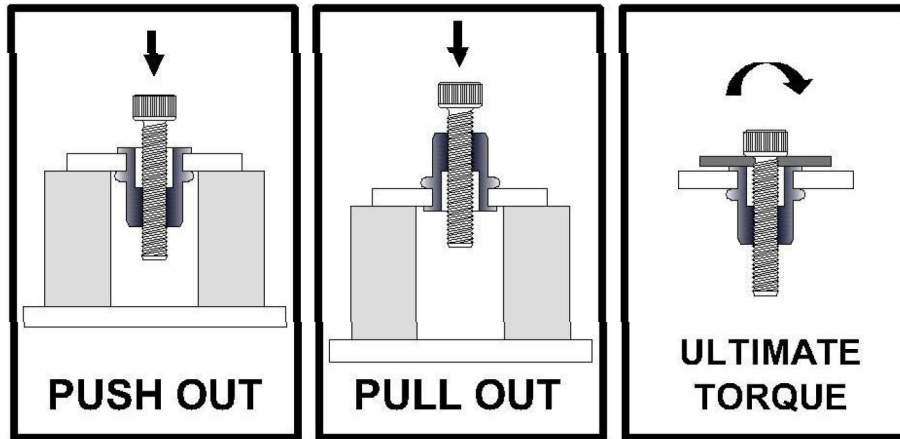

Part No.	Thread size / Plate Thickness	Push Out (Kgf)	Pull Out (Kgf)	Ultimate Torque (Kgf.cm)
NS03Z	M3 x 0.5 / 1.0mm	90	300	20
NS04Z	M4 x 0.7 / 2.0mm	130	400	30
NS05Z	M5 x 0.8 / 2.0mm	150	600	60
NS06Z	M6 x 1.0 / 3.0mm	190	1100	120
NS08Z	M8 x 1.25 / 3.0mm	280	1300	210
NS10Z	M10 x 1.5 / 4.0mm	330	2300	310
NSF04Z	M4 x 0.7 / 2.0mm	190	400	30
NSF05Z	M5 x 0.8 / 2.0mm	300	600	60
NSF08Z	M8 x 1.25 / 3.0mm	560	1300	210
NSF10Z	M10 x 1.5 / 4.0mm	820	2300	310
NSF12Z	M12 x 1.75 / 4.0mm	960	3300	*N/A
The strength showed on it indicated the min. strength.				
REMARKS:				
*Our existing equipment (max. 1,000kgf) is unable to afford the test.				

1Kgf.cm = 0.098 N.m

Kgf = 9.807N

The test results are for your reference only as the different applications will affect the performance. If you required the restrict strength figures, please make the test of your exact application.