
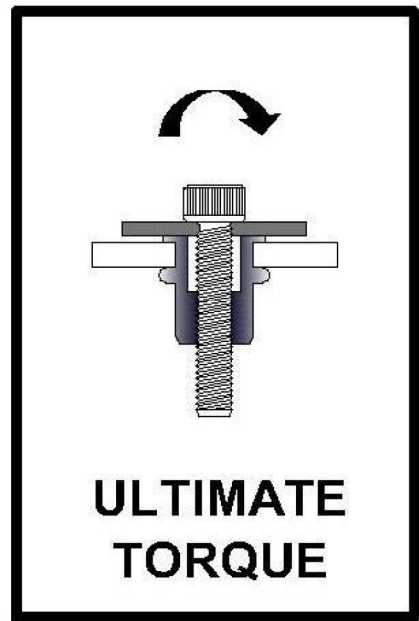
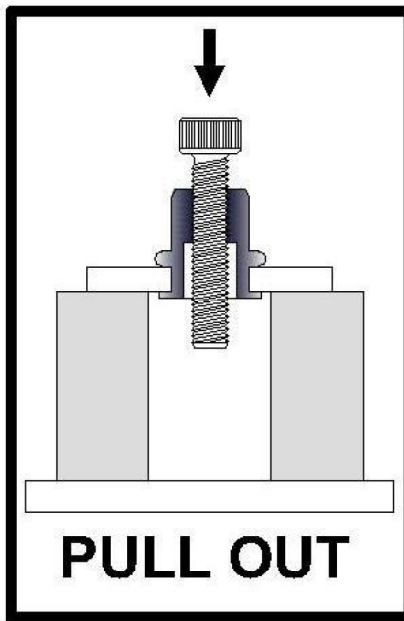


Supplier Performance Data

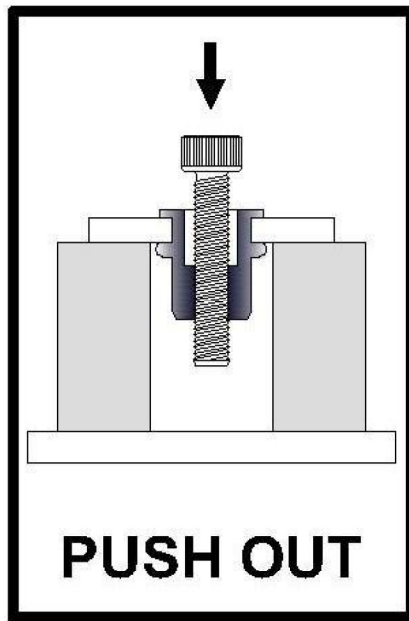

Part No.	Thread size / Plate Thickness	Push Out (Kgf)	Pull Out (Kgf)	Ultimate Torque (Kgf.cm)
NSS04	M4 x 0.7 / 2.0mm	250	800	*50
NSS05	M5 x 0.8 / 2.0mm	300	1500	*100
NSS06	M6 x 1.0 / 3.0mm	400	2100	*200
NSS08	M8 x 1.25 / 3.0mm	450	3000	*450
NSS10	M10 x 1.5 / 3.0mm	650	5100	**N/A
The strength showed on it indicated the min. strength.				
REMARKS:				
*Using class 12.9 high strength alloy screw to make ULTIMATE TORQUE test, the screw was broken at the neck but the inner thread of rivet nut is un-damaged.				
**Our existing equipment (max. 1,000kgf) is unable to afford the test.				

1Kgf.cm = 0.098 N.m

Kgf = 9.807N

The test results are for your reference only as the different applications will affect the performance. If you required the restrict strength figures, please make the test of your exact application.